
NOTES:
1. DIESEL USE
2. ENVIROLASTIC 940 LV POLYASPARTIC COATING FOR HIGH PERFORMANCE FINISH (MEMCO GREY)
3. UL 142 LABELED AND LISTED
4. TIE-DOWN POINTS ON SADDLES
5. LEAD TIME IS DEPENDENT ON IMMEDIATE APPROVAL

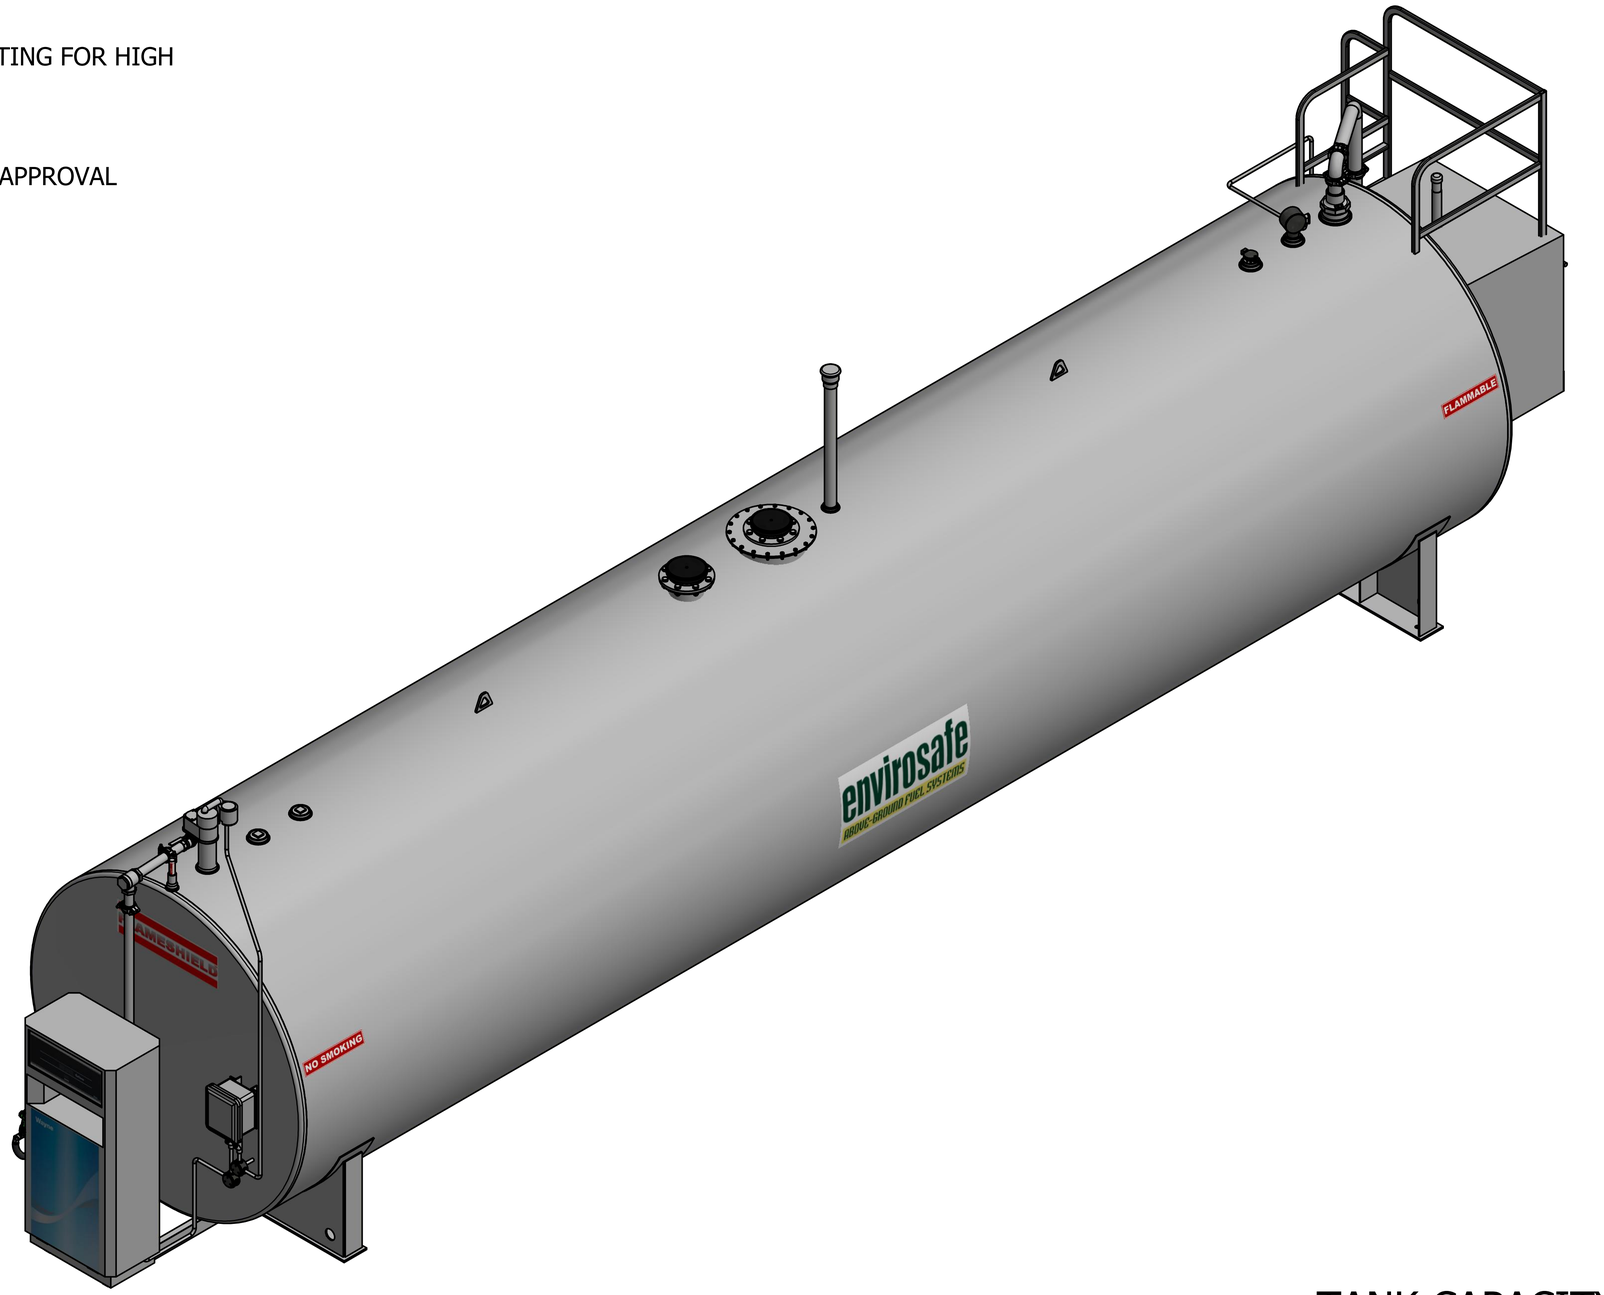

WEIGHT:
23,500 LB ±

FLAMESHIELD

TANK CAPACITY: 12,000 GALLONS

THIS DOCUMENT AND ALL INFORMATION AND DESIGN THEREON ARE THE PROPERTY ON ENVIROSAFE FUEL SYSTEMS. THIS DOCUMENT IS CONFIDENTIAL AND MUST NOT MADE PUBLIC OR COPIES WITHOUT THE WRITTEN AUTORIZATION FROM ENVIROSAFE AND IS SUBJECT TO RETURN UPON DEMAND. NO USE OF THIS DOCUMENT OR ANY DESIGN THEREON IS PERMITTED EXCEPT AS IS SPECIFICALLY AUTHORIZED IN WRITING BY ENVIROSAFE. ACCEPTANCE OF POSSESSION OF THIS DOCUMENT CONSTITUTES FULL AGREEMENT WITH THE ABOVE CONDITIONS. ALL RIGHTS RESERVED. MEMCO, INC.

#		
STI	SwRI	UL

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.

APPROVED BY:


MEMCO, INC

ER VERSION: | SALES ORDER: #


AUTHOR	AKSHAR P
MEMCO REP	
DATE	12/14/2022
SIZE D	REV
SHEET 1 OF 4	

envirosafe™ ABOVE-GROUND FUEL SYSTEMS

PARTS LIST			PARTS LIST		
ITEM	QTY	DESCRIPTION	ITEM	QTY	DESCRIPTION
1	1	12,000 GALLON FLAMESHIELD TANK MOUNTED ON SADDLES	17	1	VALVE EMERGENCY SHUT-OFF 2"X1.5" CONTAINMENT BODY STYLE
2	1	18 IN MANWAY FOR EASY INNER TANK ACCESSIBILITY WITH 8" FLANGED E-VENT OPENING	18	1	WAYNE 22 GPM REMOTE ENHANCED ONE HOSE ONE PRODUCT DISPENSER WITH 10:1 PULSER DUAL SIDE METER DISPLAY
3	1	6" NPT THREADED FLANGE			
4	5	4" NPT THREADED FLANGE	19	1	ENCLOSURE ADALET HAZ LOC TYPE 4/7/9 8"X10"X6" W/ PAN & HINGES W/ 3- 1/2" NPT CONDUIT AND BOX SINGLE PHASE SWTICH 120 V
5	1	3" NPT THREADED FLANGE			
6	1	2" NPT THREADED FLANGE	20	2	1/2" JUNCTION BOX
7	1	3" OVERFILL PREVENTION VALVE WITH DIFFUSER	21	2	CONDUIT SEAL OFF 1/2" FEMALE TO FEMALE
8	1	WELDED UL LISTED LOCKABLE 3'6"x4'2"x4' FILL BOX, CROSS BROKEN FOR EASY DRAINAGE, 2" STACK VENT AND 1/2" BALL VALVE	22	2	LIFTING LUG
			23	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT KIT
9	1	3" GROUND LEVEL FILL WITH DUST CAP AND ADAPTOR	24	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT WITH SET OF NUTS AND BOLTS AND GASKET
10	1	918 CLOCK GAUGE WITH ALARM BOX & STANDARD FLOAT	25	1	3" UPDRAFT STACK W/3" 354 SLIP ON
11	1	MONITORING CAP 2"	26	1	INTERSTITIAL LEAK GAUGE
12	1	STEP LADDER WITH SAFETY SHIELD AND HANDRAIL SYSTEM	27	1	1" HI-FLOW NOZZLE WITH 1"X18' HOSE PUMPFLEXII, 1"X12" HOSE WHIP, 1" BREKAWAY AND 1" SWIVEL
13	1	WAYNE DISPENSER SINGLE PRODUCT CONTAINMENT PAN			
14	1	FE PETRO 3/4 HP w/ 9" RISER, 88" - 149" (240V 1 PH)	28	1	ROM DOOR TO BE USED ON 48" WIDE BOX
15	1	VALVE BALL FULL FLOW BRASS 2"	29	1	TANK DECAL KIT (NOT SHOWN)
16	1	2" NPT ANTI-SIPHON VALVE 5'-10' W.C.	30	1	TOUCH UP PAINT (NOT SHOWN AND SHIPPED SEPARATELY)

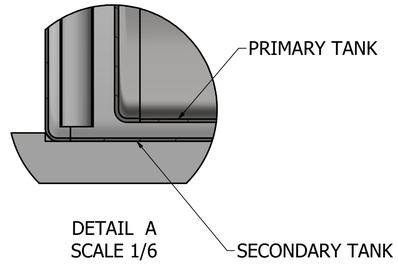

DETAIL A
SCALE 1/6

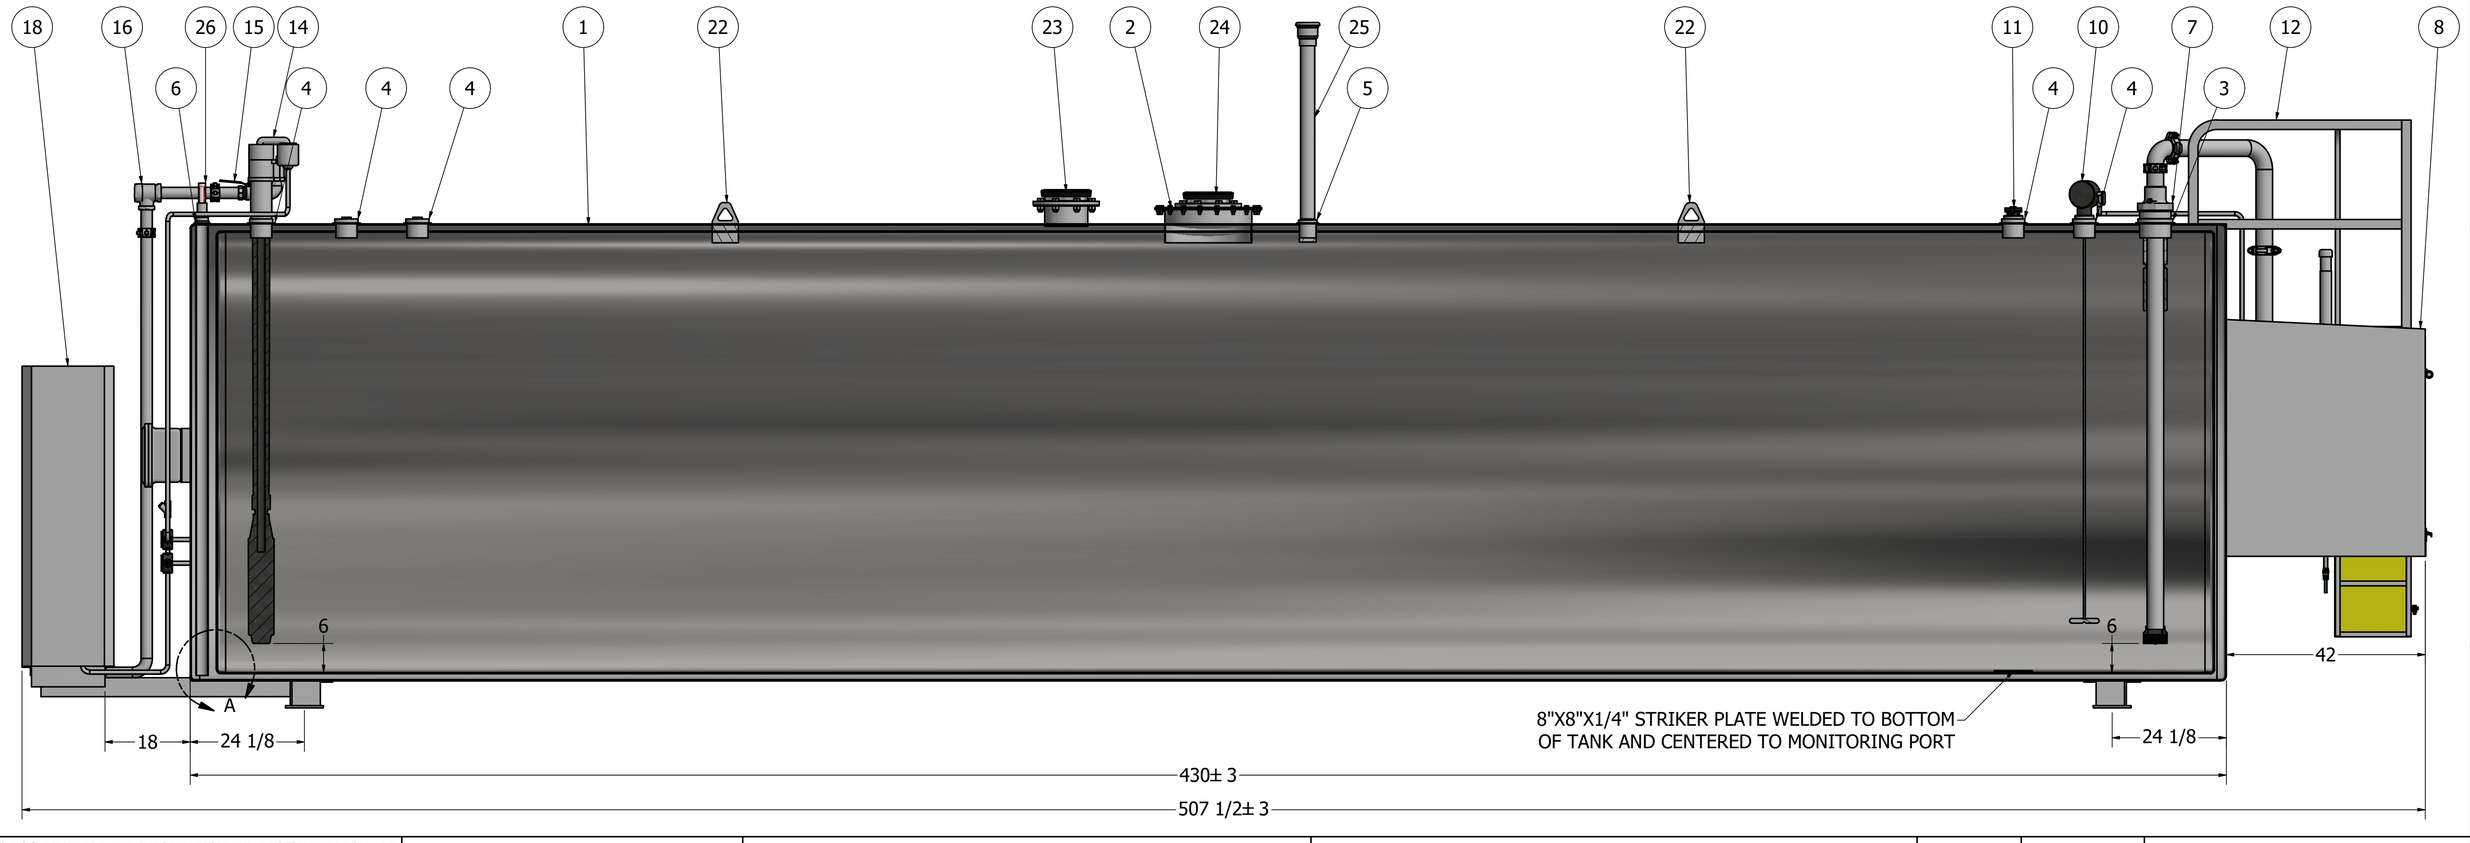

THIS DOCUMENT AND ALL INFORMATION AND DESIGN THEREON ARE THE PROPERTY ON ENVIROSAFE FUEL SYSTEMS. THIS DOCUMENT IS CONFIDENTIAL AND MUST NOT MADE PUBLIC OR COPIES WITHOUT THE WRITTEN AUTORIZATION FROM ENVIROSAFE AND IS SUBJECT TO RETURN UPON DEMAND. NO USE OF THIS DOCUMENT OR ANY DESIGN THEREON IS PERMITTED EXCEPT AS IS SPECIFICALLY AUTHORIZED IN WRITING BY ENVIROSAFE. ACCEPTANCE OF POSSESSION OF THIS DOCUMENT CONSTITUTES FULL AGREEMENT WITH THE ABOVE CONDITIONS. ALL RIGHTS RESERVED. MEMCO, INC.

#

STI | SwRI | UL

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.

APPROVED BY:


MEMCO, INC


ER VERSION:

SALES ORDER: #

AUTHOR	AKSHAR P
MEMCO REP	
DATE	12/14/2022
SIZE D	REV
SHEET 2 OF 4	

envirosafe™ ABOVE-GROUND FUEL SYSTEMS

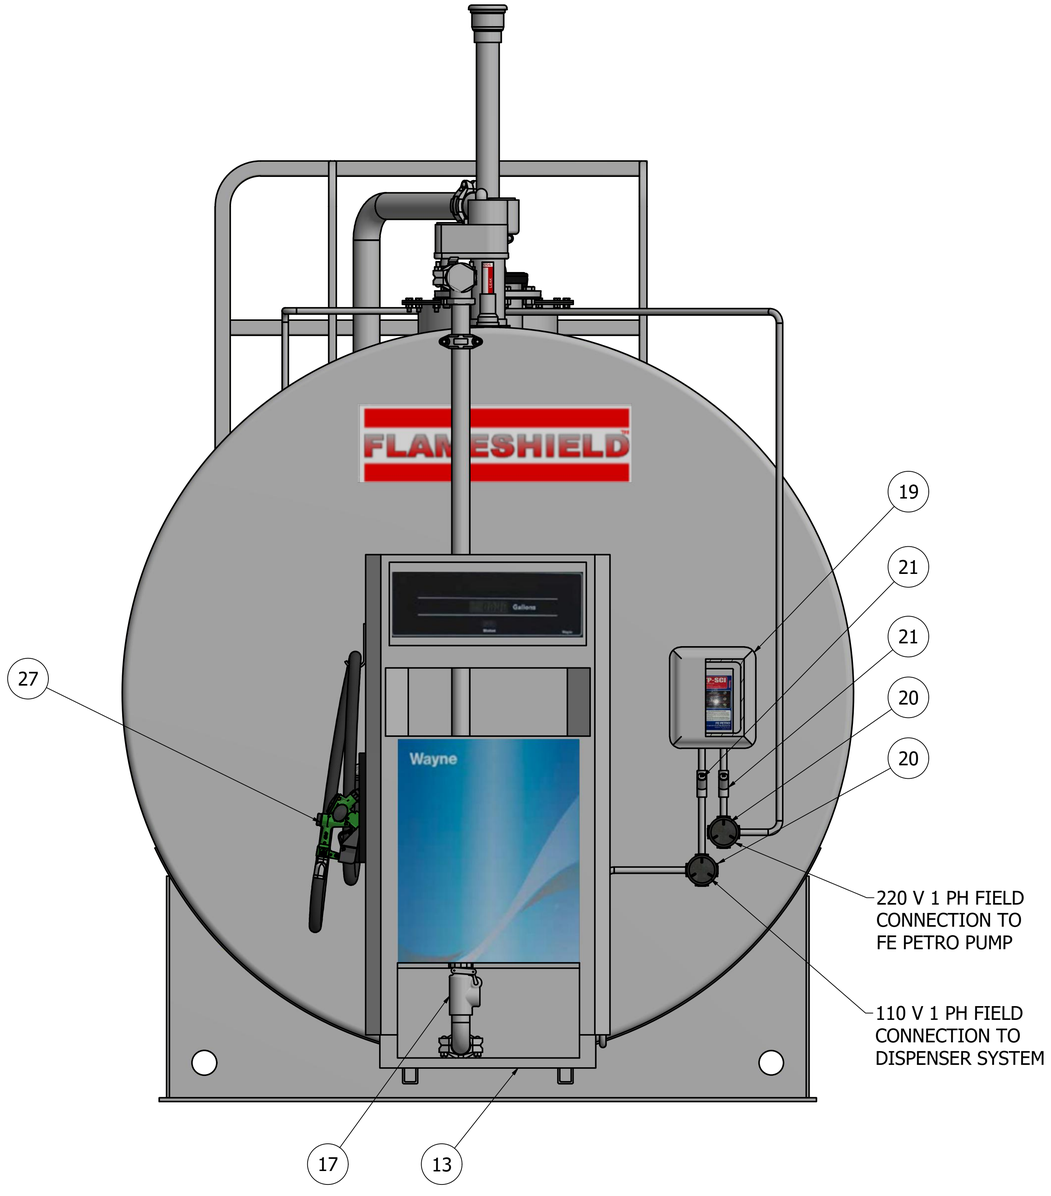

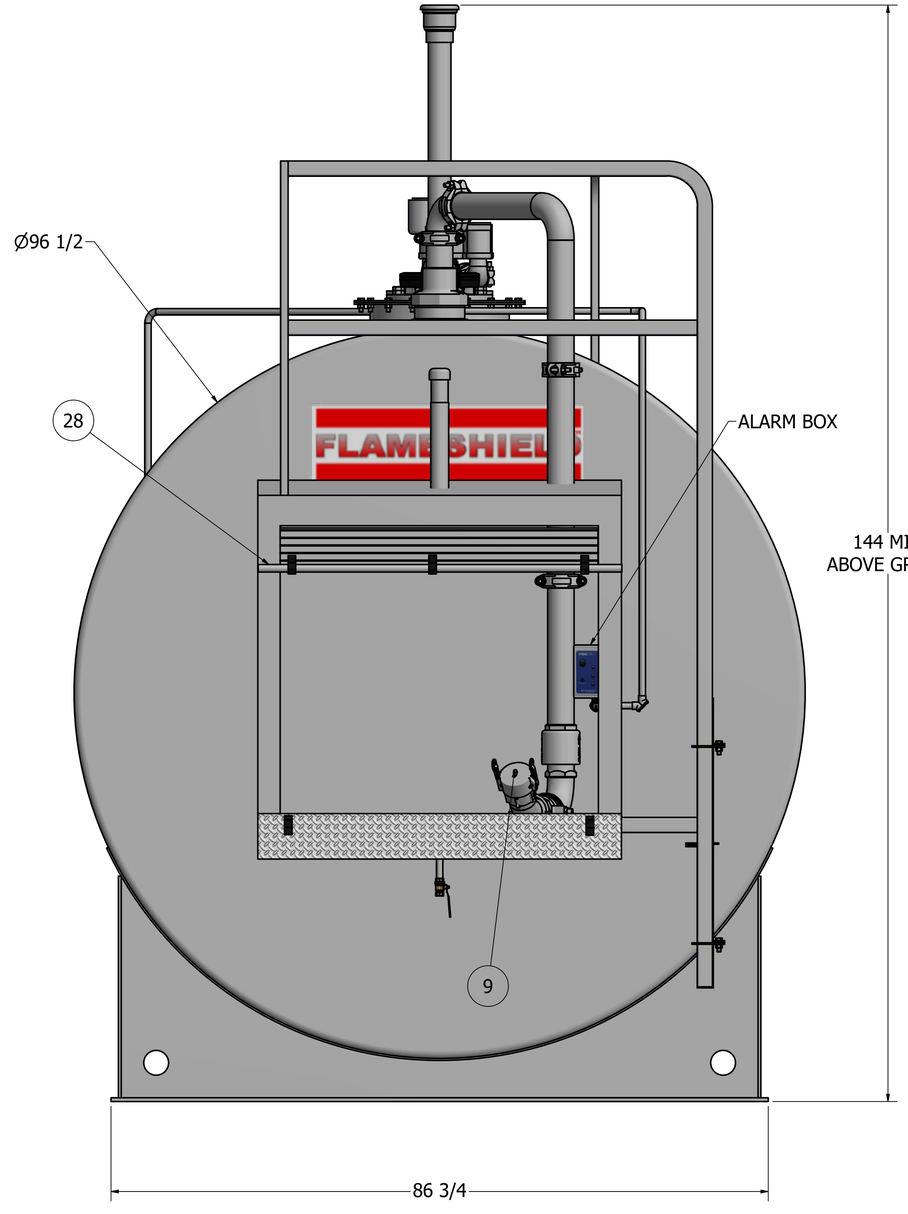

SHELL THICKNESS: 1/4"
PRI. HEAD THICKNESS: 5/16"
SEC. HEAD THICKNESS: 1/4"

THIS DOCUMENT AND ALL INFORMATION AND DESIGN THEREON ARE THE PROPERTY ON ENVIROSAFE FUEL SYSTEMS. THIS DOCUMENT IS CONFIDENTIAL AND MUST NOT MADE PUBLIC OR COPIES WITHOUT THE WRITTEN AUTORIZATION FROM ENVIROSAFE AND IS SUBJECT TO RETURN UPON DEMAND. NO USE OF THIS DOCUMENT OR ANY DESIGN THEREON IS PERMITTED EXCEPT AS IS SPECIFICALLY AUTHORIZED IN WRITING BY ENVIROSAFE. ACCEPTANCE OF POSSESSION OF THIS DOCUMENT CONSTITUTES FULL AGREEMENT WITH THE ABOVE CONDITIONS. ALL RIGHTS RESERVED. MEMCO, INC.

#

STI | SwRI | UL

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.

APPROVED BY:

MEMCO, INC

ER VERSION:

SALES ORDER: #

AUTHOR	AKSHAR P
MEMCO REP	
DATE	12/14/2022
SIZE D	REV
SHEET 3 OF 4	

envirosafe™ ABOVE-GROUND FUEL SYSTEMS

PARTS LIST			
ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	12,000 GALLON FLAMESHIELD TANK MOUNTED ON SADDLES	12000 FS TANK ASSEMBLY_NEW
2	1	18 IN MANWAY FOR EASY INNER TANK ACCESSIBILITY WITH 8" FLANGED E-VENT OPENING	P-18X8 MANWAY COVER, P-18 MANWAY 7 NECK
3	1	6" NPT THREADED FLANGE	P-SERIES-159
4	5	4" NPT THREADED FLANGE	P-SERIES 262
5	1	3" NPT THREADED FLANGE	P-SERIES 260
6	1	2" NPT THREADED FLANGE	P-SERIES 258
7	1	3" OVERFILL PREVENTION VALVE WITH DIFFUSER	P-9095AA-3300AVEVR, P-539AT-0300 AD
8	1	WELDED UL LISTED LOCKABLE 3'6"x4'2"x4' FILL BOX, CROSS BROKEN FOR EASY DRAINAGE, 2" STACK VENT AND 1/2" BALL VALVE	A-BOX 4 FT ASSEMBLY
9	1	3" GROUND LEVEL FILL WITH DUST CAP AND ADAPTOR	A-J-FILL
10	1	918 CLOCK GAUGE WITH ALARM BOX & STANDARD FLOAT	P-918-0100AG
11	1	MONITORING CAP 2"	P-179M-0100AC
12	1	STEP LADDER WITH SAFETY SHIELD AND HANDRAIL SYSTEM	5K-12K FS LADDER WITH HANDRAIL AND SAFETY SHIELD
13	1	WAYNE DISPENSER SINGLE PRODUCT CONTAINMENT PAN	WAYNE DISPENSER CONTAINEMENT PAN_NEW
14	1	FE PETRO 3/4 HP w/ 9" RISER, 88" - 149" (240V 1 PH)	P-STP75-VL2-09
15	1	VALVE BALL FULL FLOW BRASS 2"	P-0740-30282
16	1	2" NPT ANTI-SIPHON VALVE 5'-10' W.C.	P-910-2100 AV
17	1	VALVE EMERGENCY SHUT-OFF 2"X1.5" CONTAINMENT BODY STYLE	P-636CU-0100 AVU
18	1	WAYNE 22 GPM REMOTE ENHANCED ONE HOSE ONE PRODUCT DISPENSER WITH 10:1 PULSER DUAL SIDE METER DISPLAY	P-3G7201D29GJKUY
19	1	ENCLOSURE ADALET HAZ LOC TYPE 4/7/9 8"X10"X6" W/ PAN & HINGES W/ 3- 1/2" NPT CONDUIT AND BOX SINGLE PHASE SWTICH 120 V	P-XCE081006N4
20	2	1/2" JUNCTION BOX	P-GUR-1
21	2	CONDUIT SEAL OFF 1/2" FEMALE TO FEMALE	P-EYS1
22	2	LIFTING LUG	P-2-899MLL
23	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT KIT	P-244OF-08080 AK
24	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT WITH SET OF NUTS AND BOLTS AND GASKET	P-244OF-0100AVEVR, P-244F-0110 2G, P-244F-0107 AN
25	1	3" UPDRAFT STACK W/3" 354 SLIP ON	3" STACK, P-354-0300AV
26	1	INTERSTITIAL LEAK GAUGE	P-K-2-96
27	1	1" HI-FLOW NOZZLE WITH 1"X18' HOSE PUMPFLEXII, 1"X12" HOSE WHIP, 1" BREKAWAY AND 1" SWIVEL	P-173312-03, P-22341641181, P-22341641091, P-2276, P-9405X16X16
28	1	ROM DOOR TO BE USED ON 48" WIDE BOX	P-ROM DOOR 41.25 W
29	1	TANK DECAL KIT (NOT SHOWN)	P-DECAL KIT
30	1	TOUCH UP PAINT (NOT SHOWN AND SHIPPED SEPARATELY)	

THIS DOCUMENT AND ALL INFORMATION AND DESIGN THEREON ARE THE PROPERTY ON ENVIROSAFE FUEL SYSTEMS. THIS DOCUMENT IS CONFIDENTIAL AND MUST NOT MADE PUBLIC OR COPIES WITHOUT THE WRITTEN AUTORIZATION FROM ENVIROSAFE AND IS SUBJECT TO RETURN UPON DEMAND. NO USE OF THIS DOCUMENT OR ANY DESIGN THEREON IS PERMITTED EXCEPT AS IS SPECIFICALLY AUTHORIZED IN WRITING BY ENVIROSAFE. ACCEPTANCE OF POSSESSION OF THIS DOCUMENT CONSTITUTES FULL AGREEMENT WITH THE ABOVE CONDITIONS. ALL RIGHTS RESERVED. MEMCO, INC.

#

STI | SwRI | UL

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.

APPROVED BY:

MEMCO, INC

ER VERSION: | SALES ORDER: #

AUTHOR	AKSHAR P
MEMCO REP	
DATE	12/14/2022
SIZE D	REV
SHEET 4 OF 4	

envirosafe™ ABOVE-GROUND FUEL SYSTEMS